


# Roly® Safeti-Gate

Mezzanine Safeti-Gates, Inc., 174 Western Avenue, Essex, MA 01929-1110  
(978) 768-7593 • Fax (978) 768-1101

E-mail: [msg@shore.net](mailto:msg@shore.net) • Web Page: [www2.shore.net/~msg](http://www2.shore.net/~msg)

***Now available in a 90-degree model***

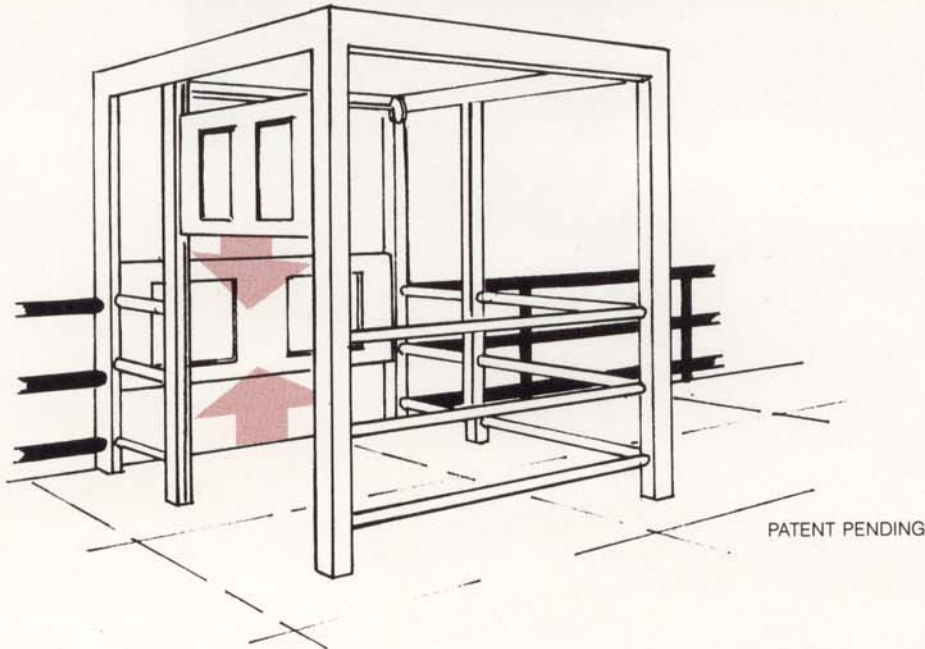

- The 90-degree unit reduces the potential for falls and other accidents associated with Mezzanine pallet loading areas.
- The Gate structure is permanently anchored at the ledge of the Mezzanine.
- The configuration prohibits worker access to the ledge when material is delivered or removed.
- Attached by cables and tube shafts in a unique patented way that one gate closes when the other gate opens.
- Can be made right hand, left hand, three sided or four sided.
- These heavy-duty units meet OSHA requirements.

The new 90-degree Roly Safeti Gate is available in easy-to-assemble pre-engineered modules. The Mezzanine worker steps outside the work station and lowers the rear gate—the ledge gate is automatically opened. The pallets are now able to be brought to or taken away from the pallet drop area by the forklift truck. After this is done the ledge gate is closed automatically when the rear gate is opened to allow worker access. No special tools are required to install a 90-degree model Roly Safeti-Gate. Assembly generally requires no more than two (2) hours.

An **OPEN** and **SHUT** case for Plant Mezzanine Safety